

SE 325



SURGELATI



ALIMENTI

Congelatori SE
classe

A++



Spessore isolamento 100 mm. / Insulation thickness 100 mm. / Epaisseur isolation 100 mm. / Isolierung Stärke 100 mm. / Espesor aislamiento 100 mm.


Ampia maniglia con serratura di serie
Large handle with standard lockInterno in alluminio
Inside made of aluminumTermometro digitale esterno
External digital thermometer

	Watt		°C			H ₂ O		Lt.	Serie	Max	mm. (LxPxH)				Kg.
SE 255	75	230v/1/50Hz	-17/-24			MAN	R600a	244	n° 2	n° 9	1260x600x850	Di serie	Di serie	1	61
SE 325	75	230v/1/50Hz	-17/-24			MAN	R600a	321	n° 3	n° 15	1560x600x850	Di serie	Di serie	1	68

Dati di collaudo - Test details - Détails d'essai - Prüfungsergebnisse - Datos de ensayo - MAX = (25°C - % U.R. 60)

Prezzi vedi a pagina 44
Prices see page 44ATTREZZATURE COMPLEMENTARI di servizio
ADDITIONAL EQUIPMENT'S SERVICEIPERMERCATI
HYPERMARKETSSUPERMERCATI
SUPERMARKETSPIZZERIA
PIZZERIARISTORAZIONE
CATERING EQUIPMENTPASTICCERIA
PASTRYARMADI SPECIALI
SPECIAL CABINETSMINIBAR & FARMACIA
MINIBAR & PHARMACYREFRIGERATORI & CONGELATORI
REFRIGERATORS & FREEZERSPICCOLA ESPOSIZIONE
SMALL DISPLAYS

SB

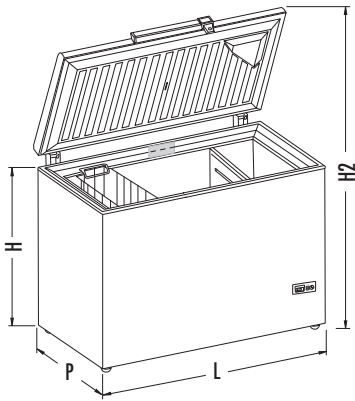

DIMENSIONI / SIZE / DIMENSIONS
MABE / MEDIDAS

	L (mm)	P (mm)	H (mm)	H2 (mm)
SB 200	920	650 (700)	860	930
SB 300	1260	650 (700)	860	930
SB 400	1560	650 (700)	860	930

Basso consumo di energia
Low energy consumption
Consommation d'énergie modérée
Geringer Energieverbrauch
Bajo consumo de energía


Termometro esterno
External Thermometer
Thermomètre extérieur
Aussenthermometer
Termómetro exterior

Spessore isolamento 80 mm.
Insulation thickness 80 mm.
Épaisseur isolation 80 mm.
Isolierung Stärke 80 mm.
Espesor aislamiento 80 mm.



Esterno in acciaio verniciato bianco. Interno in alluminio
Outside made of white painted steel. Inside aluminium
Extérieur en acier peint en blanc. Intérieur en aluminium
Außenfläche aus weißlackiertem Stahl. Innenfläche aus Aluminium
Externo de acero pintado blanco. Interno de aluminio

SE

SE 255

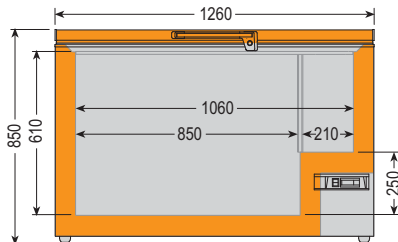

SE 325

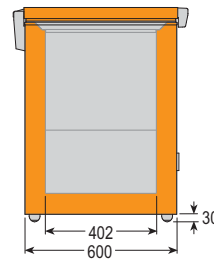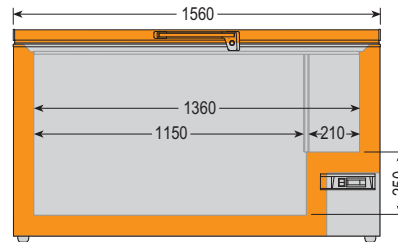

Basso consumo di energia
Low energy consumption
Consommation d'énergie modérée
Geringer Energieverbrauch
Bajo consumo de energía

Esterno in acciaio verniciato bianco. Interno in alluminio
Outside made of white painted steel. Inside aluminium
Extérieur en acier peint en blanc. Intérieur en aluminium
Außenfläche aus weißlackiertem Stahl. Innenfläche aus Aluminium
Externo de acero pintado blanco. Interno de aluminio




Spessore isolamento 100 mm.
Insulation thickness 100 mm.
Épaisseur isolation 100 mm.
Isolierung Stärke 100 mm.
Espesor aislamiento 100 mm.

ELVT

NEW

ELVT 510 Piedini di serie
Standard feet

ELVT 150
ELVT 310
ELVT 410 Ruote di serie
Standard castors

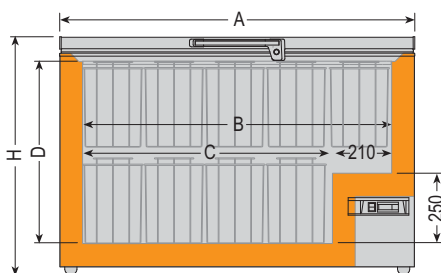

Spessore di isolamento mm. 80
Insulation thickness 80 mm.
Épaisseur d'isolation 80 mm.
Isolierstärke 80 mm.
Espesor de aislamiento 80 mm.

Esterno in lamiera verniciata bianco
Exterior in white painted plate
Extérieur en tôle verni en blanc
Aussenseite aus lackiertem weiß Blech
Exterior en chapa barnizada blanco

DIMENSIONI / SIZE / DIMENSIONS / MABE / MEDIDAS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
ELVT 150	720	560	350	635	695	440	600	885
ELVT 310	1260	1100	890	635	695	440	600	885
ELVT 410	1560	1400	1190	635	695	440	600	885
ELVT 510	1660	1500	1290	640	758	500	660	890

ONE
OMEGA
professional equipment

<http://www.omegaone.gr> email: info@omegaone.gr

Tel: 0030 2103472270 Fax: 0030 2103476037